
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE U								
	Material	High Conductivity Seamless Copper Tube						
	Plating	Electro-Tin						
	Wire Size	4 AWG						
	Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric						
	Wire Strip Length	5/8 in.						
	Stud Size	#10						
	UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.						
	UL Temperature Rating	90°C						
	C.S.A Certified Wire Connector	Yes						
	Panduit Color Code	GRAY						



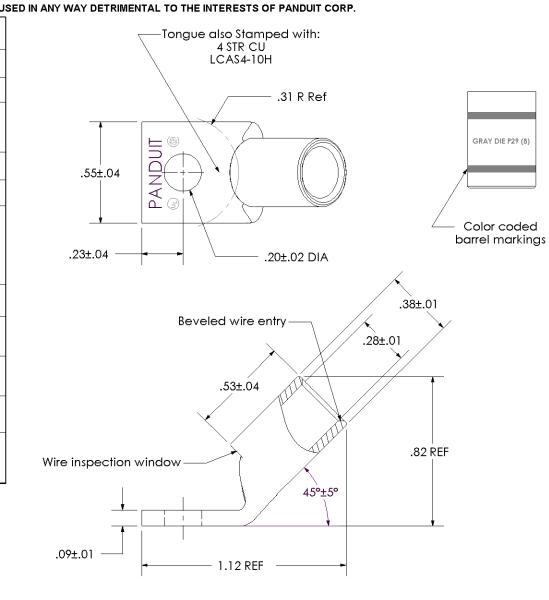

Panduit Die Index No. P29

on Barrel

on Barrel

Alternate Industry Die Index No. () on Barrel



CERTIFIED LISTED

(8)

Wire Connector

						CORP. TINLEY PARK, ILLINOIS
						LCAS4-10H-L
01	4-03	PWS	PWS	REMOVED PANDUIT FROM BARREL MARKINGS	10790	Copper Lug - One-Hole, Short Barrel, 45° Angle Tongue
REV	DATE	BY	снк	DESCRIPTION	ECN	N/A DRAWING NO / CAD FILE LCAS4-10H-CUST