


NOTES

1. MATERIAL : BRASS 0.40 ± 0.03 THK'
2. FINISH : POST-TIN PLATING
3. RECOMMENDED LENGTH OF WIRE STRIP IS 5.3-5.8

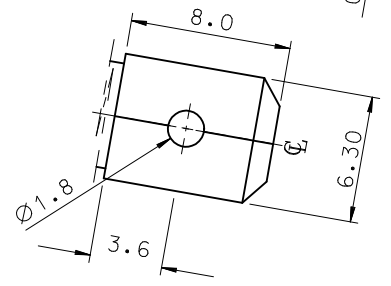

MATERIAL NO.	PART NO.	W1	H1	W2	H2	WIRE	INSUL.DIA.
357253910	35725-3910	3.1	3.8	4.9	5.6	AWG#18-#16	MAX.Ø3.12
357254910	35725-4910			6.5	6.35	AWG#14	MAX.Ø3.50
357255910	35725-5910	4.0	4.2			AWG#12	MAX.Ø3.98

# WIRE : UL1015

REVISED EC NO: KOR2012-0110 DRWN:HYOU CHKD:SH CHU APPR:YSK1M02 2012/04/23 2012/04/25	DESCRIPTION B1	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.30 ± --- 1 PLACE ± 0.20 ± --- 0 PLACE ± ±		mm INCH	DRAWN BY W.Y.YANG	DATE 1993/06/26	TITLE .250 PIGGY BACK				
		ANGULAR ± 1 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY C.W.LEE		DATE 1993/06/26		MATERIAL NO.	
		SEE TABLE		DOCUMENT NO. SD-35725-*910		SHEET NO. 1 OF 1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

