Incandescent Indicators



T-1 3/4 MIDGET **FLANGE BASE** See lamp ratings

TWO TERMINALS-FULLY INSULATED FOR MOUNTING IN 15/32" CLEARANCE HOLE

MEET OR EXCEED ENVIRONMENTAL AND OPERATIONAL REQUIREMENTS OF MIL-L-6723 AND MIL-L-3661B

Feature

Anti-rotation (locked) construction: Provides for secure locking of the socket terminal assembly in the mounting bushing and of the center terminal to the insulating disc. The notched mounting bushing receives the matched insulating disc to prevent the rotation of the mounting bushing.

MATERIALS AND FINISHES

- Mounting Bushing: Aluminum, black anodize finish. Optional - clear anodize finish.
- Internal-tooth Lockwasher and Mounting Nut: Steel, cadmium plated with yellow iridescent chromate finish.
- Terminals: Brass, hot tinned with elongated slot.

How to designate the Three Digit Part Number Suffix (-XXX)

Finish	Resistor	Hardware
5 — black anodize 6 — clear anodize	0 — none	2 — steel

Example: 162-8430-0971-602 (clear anodize finish, no resistor, steel hardware).

FRONT MOUNTING .018 ±.005 X 19/32 ±.020 O.D. INTERNAL TOOTH LOCKWASHER 3/32 X 9/16 ACROSS FLATS HEX. NUT 15/32-32 NS THD. MOUNTING BUSHING .030 ±.005 + SIGN MARKED ON THE TERMINAL CONNECTED TO THE CENTER CONTACT. 3/64 X 7/64



162-8430-0971-502



162-8430-1471-502




178-8430-0371-502



178-8430-0111-502



178-8430-2131-502

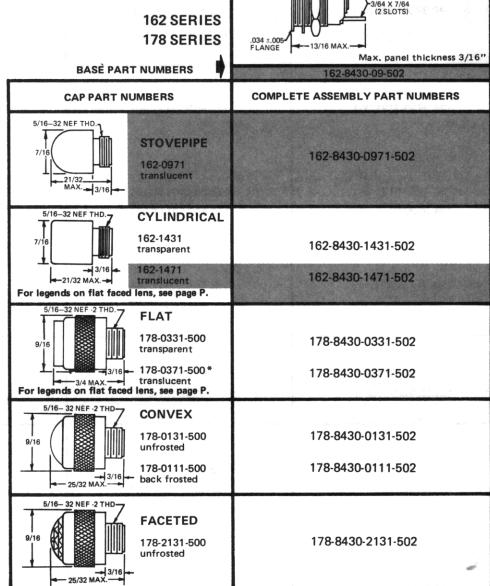

^{*}Specify translucent colors as follows: Red -0371; Green -0372; Yellow (amber) -0373; Blue -0374; White -0375; Light yellow -0376.

Part numbers shown in gray are normally in inventory at your Dialight Distributor.