



74LVC574A

(Top Transparent View )

ы К С

চিটি

GLK = 0

**QFN-20** 

(19 1Q

(16 4Q

(18 2Q

(17 3Q

15 5Q

(14 6Q

(13 7Q

(12 8Q

### OCTAL D-TYPE FLIP-FLOP WITH 3 STATE OUTPUTS

□ Vcc

\_ 1Q

] 2Q

7 3Q

740

\_ 5Q

760

7Q 🗆

7 8Q

псі к

PCs, Notebooks, Netbooks, Ultrabooks

Networking Computer Peripherals, Hard Drives, CD/DVD

1D

2D

3D 🔄

4D 5

5D 6

6D 7

7D 8)

8D 9)

3)

Pin Assignments

10

OF [

1D [

2D 🛛

3D [

4D 🗆

5D F

6D Г

7D 🛛

8D F

Applications

**Bus Driving** 

ROM

GND

(Top View)

20

19

18

17

16

15

14

13

12

11

TSSOP-20

General Purpose Logic

Power Down Signal Isolation

Wide Array of Products Such as:

TV, DVD, DVR, set top box

## Description

The 74LVC574A provides eight edge-triggered D-type flip-flops featuring 3-state outputs designed specifically for driving highly capacitive or relatively low-impedance loads. These devices are particularly suitable for implementing buffer registers, input/output (I/O) ports, bidirectional bus drivers, and working registers. On the positive transition of the clock (CLK) input, the Q outputs are set to the logic levels set up at the data (D) inputs. A buffered output-enable  $\overline{(OE)}$  input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without interface or pullup components.  $\overline{OE}$  does not affect internal operations of the latch. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

These devices feature inputs and outputs on opposite sides of the package that facilitate printed circuit board layout.

The device is designed for operation with a power supply range of 1.65V to 3.6V. The device is fully specified for partial power down applications using  $I_{OFF}$ .

#### Features


- Supply Voltage Range from 1.65V to 3.6V
- Sinks or Sources 24mA at V<sub>CC</sub> = 3V
- CMOS Low Power Consumption
- I<sub>OFF</sub> Supports Partial-Power Down Operation
- Inputs or Outputs Accept Up to 5.5V
- Inputs Can Be Driven by 3.3V or 5V Allowing for Mixed Voltage Applications
- Schmitt Trigger Action at All Inputs
- Typical V<sub>OLP</sub> (Quiet Output Ground Bounce) less than 0.8V with V<sub>CC</sub> = 3.3V and T<sub>A</sub> = +25°C
- Typical V<sub>OHV</sub> (Quiet Output Dynamic VOH) greater than 2.0V with V<sub>CC</sub> = 3.3V and T<sub>A</sub> = +25°C
- ESD Protection Tested per JESD 22
  - Exceeds 200-V Machine Model (A115)
  - Exceeds 2000-V Human Body Model (A114)
  - Exceeds 1000-V Charged Device Model (C101)
  - Latch-Up Exceeds 250mA per JESD 78, Class I
- All devices are:
  - Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
  - Halogen and Antimony Free. "Green" Device (Note 3)

Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.

- 2. See http://www.diodes.com/quality/lead\_free.html for more information about Diodes Incorporated's definitions of Halogen and Antimony free, "Green" and Lead-Free.
- 3. Halogen and Antimony free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.



## **Ordering Information**



Dort Number	Package Package Package		13" Tape	and Reel	
Part Number	Code	(Note 4 & 5)	Size	Quantity	Part Number Suffix
74LVC574AT20-13	T20	TSSOP-20	6.4mm X 6.5mm X 1.2mm 0.65 mm lead pitch	2500/Tape & Reel	-13
74LVC574AQ20-13	Q20	V-QFN4525-20	2.5mm X 4.5mm X 0.95mm 0.50 mm lead pitch	2500/Tape & Reel	-13


Notes:

Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.
V-QFN4525-20 is a JEDEC recognized naming convention that specifies the package thickness category as V and the number 4525 describes the package as 4.5mm X 2.5mm.

# **Pin Descriptions**

Pin Number	Pin Name	Description
1	OE	Output Enable
2	D1	Data Input
3	D2	Data Input
4	D3	Data Input
5	D4	Data Input
6	D5	Data Input
7	D6	Data Input
8	D7	Data Input
9	D8	Data Input
10	GND	Ground
11	CLK	Clock
12	Q8	Latch Output
13	Q7	Latch Output
14	Q6	Latch Output
15	Q5	Latch Output
16	Q4	Latch Output
17	Q3	Latch Output
18	Q2	Latch Output
19	Q1	Latch Output
20	Vcc	Supply Voltage

# Logic Diagram

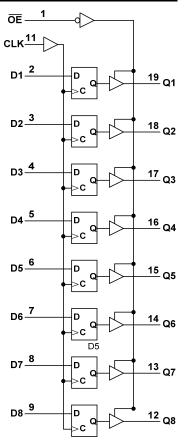

# **Function Table**

(Each Latch)						
	INPUTS	8	OUTPUT			
ŌE	CLK	D	Q			
L	$\uparrow$	Н	Н			
L	$\uparrow$	L	L			
L	H or L	Х	Q <sub>0</sub>			
Н	Х	Х	Z			



## Absolute Maximum Ratings (Notes 6 & 7)

Symbol	Description	Rating	Unit
ESD HBM	Human Body Model ESD Protection	2	kV
ESD CDM	Charged Device Model ESD Protection	1	kV
ESD MM	Machine Model ESD Protection	200	V
Vcc	Supply Voltage Range	-0.5 to +7.0	V
VI	Input Voltage Range	-0.5 to +7.0	V
I <sub>IK</sub>	Input Clamp Current VI < 0V	-20	mA
I <sub>OK</sub>	Output Clamp Current V <sub>O</sub> < 0V	-50	mA
lo	Continuous Output Current -0.5V < V <sub>O</sub> V <sub>CC</sub> +0.5V	±50	mA
Icc	Continuous Current Through V <sub>CC</sub>	100	mA
I <sub>GND</sub>	Continuous Current Through GND	-100	mA
TJ	Operating Junction Temperature	-40 to +150	°C
T <sub>STG</sub>	Storage Temperature	-65 to +150	°C
P <sub>TOT</sub>	Total Power Dissipation	500	mW

Notes:

6. Stresses beyond the absolute maximum may result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.7. Forcing the maximum allowed voltage could cause a condition exceeding the maximum current or conversely forcing the maximum current could cause a condition exceeding the maximum voltage. The ratings of both current and voltage must be maintained within the controlled range.

# Recommended Operating Conditions (Note 8)

Symbol	Parameter	Conditions	Min	Мах	Unit
N/	Supply Voltage	Operating	1.65	3.6	V
V <sub>CC</sub>	Supply Voltage	Data Retention Only	1.5	—	V
VI	Input Voltage	—	0	5.5	V
Vo	Output Voltage	—	0	V <sub>CC</sub>	V
		V <sub>CC</sub> = 1.65V	—	-4	
	High-Level Output Current	V <sub>CC</sub> = 2.3V	—	-8	
IOH		V <sub>CC</sub> = 2.7V	—	-12	mA
		V <sub>CC</sub> = 3.0V	—	-24	
		V <sub>CC</sub> = 1.65V	—	4	
		V <sub>CC</sub> = 2.3V	—	8	mA
IOL	Low-Level Output Current	V <sub>CC</sub> = 2.7V	—	12	- MA
		V <sub>CC</sub> = 3.0V	—	24	1
Δt/ΔV	Input Transition Rise or Fall Rate		—	10	ns/V
T <sub>A</sub>	Operating Free-Air Temperature		-40	+125	°C

Note: 8. Unused inputs should be held at  $V_{\text{CC}}$  or Ground.



# **Electrical Characteristics**

Ourseland	Demonster	Toot Conditions		T <sub>A</sub> = -40°C	C to +85°C	T <sub>A</sub> = -40°C to +125°C		Unit
Symbol	Parameter	Test Conditions	Vcc	Min	Max	Min	Max	Unit
			1.65V to 1.95V	V <sub>CC</sub> X 0.65	_	V <sub>CC</sub> X 0.65	_	
VIH	High-Level Input Voltage		2.3V to 2.7V	1.7	—	1.7	—	V
	Vollage		3.0V to 3.6V	2	—	2	_	
			1.65V to 1.95V	—	V <sub>CC</sub> X 0.35	—	V <sub>CC</sub> X 0.35	
VIL	Low-Level Input Voltage		2.3V to 2.7V	—	0.7	—	0.7	V
	Vollago		3.0V to 3.6V	—	0.8	—	0.8	
		I <sub>OH</sub> = -50μA	1.65V to 3.6V	V <sub>CC</sub> -0.2	—	V <sub>CC</sub> -0.3	—	
		I <sub>OH</sub> = -4mA	1.65V	1.2	—	1.05	_	
V	High-Level	I <sub>OH</sub> = -8mA	2.3V	1.7	_	1.65	_	
V <sub>OH</sub>	Output Voltage	10	2.7V	2.2		2.05	—	v
		I <sub>OH</sub> = -12mA	3.0V	2.4	_	2.48	_	v
		I <sub>OH</sub> = -24mA	3.0V	2.3	—	2.0	—	
		I <sub>OL</sub> = 100μA	1.65V to 3.6V		0.2	_	0.3	
		I <sub>OL</sub> = 4mA	1.65V		0.45	_	0.65	
V <sub>OL</sub>	Low-Level Output Voltage	I <sub>OL</sub> = 8mA	2.3V	_	0.60	_	0.80	V
	vollage	I <sub>OL</sub> = 12mA	2.7V	—	0.40	_	0.60	1
		I <sub>OL</sub> = 24mA	3.0V	_	0.55	_	0.80	1
I <sub>OFF</sub>	Power Down Leakage Current	$V_{\rm I}$ or $V_{\rm O}$ = 0 or 5.5V	0V	_	±10	_	20	μA
h	Input Current Control Pins	$V_{I}$ = GND or 5.5V	0 to 3.6V	—	±5	_	±20	μA
I <sub>OZ</sub>	Z-State Current including Input Current I/O Pins	V <sub>I</sub> = GND or 5.5V V <sub>O</sub> = 0 to 5.5V	3.6V	_	±5	_	±20	μA
Icc	Supply Current	$V_{I} = GND \text{ or } V_{CC}, I_{O} = 0$	3.6V	—	10	—	40	μA
$\Delta I_{CC}$	Additional Supply Current	One Input at V <sub>CC</sub> -0.6V I <sub>O</sub> = 0A	2.7V to 3.6V	—	500	_	5000	μA
Ci	Input Capacitance	$\frac{\text{Control Pins}}{I/O \text{Pins}} V_{I} = \text{GND or } V_{CC}$	0V to 3.6V	4.0 ty 5.5 ty	/pical /pical	4.0 ty 5.5 ty	/pical /pical	pF



# **Switching Characteristics**

Symbol	Parameter	Test	Vcc	-	T <sub>A</sub> = +25°0	<u> </u>		₩°C to 5°C		40°C to 25°C	Unit		
		Conditions		Min	Тур	Мах	Min	Max	Min	Max			
			1.8V ± 0.15V	35	40		35		30				
	Maximum	Figure 1	2.5V ± 0.2V	50	60		50		45		Mh		
f <sub>MAX</sub>	Frequency		2.7V	80	100		80		64		IVITI		
			3.3V ± 0.3V	100	125		100		80				
			1.8V ± 0.15V	5.0	2.5		5.0		5.5				
	Pulse Width	Figure 1	2.5V ± 0.2V	4.0	2.0		4.0		4.5				
t <sub>W</sub>	CLK	-	2.7V	3.3	1.7		3.3		3.5		ns		
			3.3V ± 0.3V	3.0	1.5		3.0		3.5				
			1.8V ± 0.15V	4.0	2.0		4.0		4.5				
	Set-up Time D <sub>N</sub>	Figure 1	2.5V ± 0.2V	3.0	1.5		3.0		3.5				
tsu	to CLK	0	2.7V	2.0	1.0		2.0		2.5		ns		
			3.3V ± 0.3V	2.0	1.0		2.0		2.5				
			1.8V ± 0.15V	3.0	1.5		3.0		3.5		ns		
	Hold Time	Figure 1	2.5V ± 0.2V	2.0	1.0		2.0		2.5				
t <sub>H</sub> D <sub>N</sub> to CLK	D <sub>N</sub> to CLK	3.	2.7V	1.5	1.0		1.5		2.0				
		3.3V ± 0.3V	1.5	1.0		1.5		2.0		]			
					1.8V ± 0.15V	1.0	6.0	15.1	1.0	15.7	1.0	16.9	
	Propagation	Figure 1	2.5V ± 0.2V	1.0	3.9	8.8	1.0	9.0	1.0	10.5	_		
t <sub>PD</sub>	Delay	Delay	2.7V	1.0	4.2	8.1	1.0	9.4	1.0	10.0	ns		
	CLK to Q <sub>N</sub>		3.3V ± 0.3V	1.5	3.8	7.1	1.5	7.6	1.5	8.1	-		
			1.8V ± 0.15	1.0	7.8	16.5	1.0	17.0	1.0	18.4			
	Enable Time		2.5V ± 0.2V	1.0	4.0	9.0	1.0	9.5	1.0	10.5	-		
t <sub>EN</sub>	$\overline{OE}$ to $Q_N$	Figure 1	2.7V	1.0	4.4	8.3	1.0	8.5	1.0	10.0	ns		
			3.3V ± 0.3V	1.7	4.1	7.3	1.7	7.5	1.7	9.0	-		
			1.8V ± 0.15V	1.0	7.8	16.5	1.0	17.0	1.0	18.4			
	Disable Time		2.5V ± 0.2V	1.0	4.0	9.0	1.0	9.5	1.0	10.5			
t <sub>DIS</sub>	$\overline{OE}$ to $Q_N$	Figure 1	2.7V	1.0	4.4	8.3	1.0	8.5	1.0	10.0	ns		
			3.3V ± 0.3V	1.7	4.1	7.3	1.7	7.5	1.7	9.0			
			1.8V ± 0.15V	1.0	7.8	16.5	1.0	17.0	1.0	18.4	1		
	Disable Time		2.5V ± 0.2V	1.0	4.0	9.0	1.0	9.5	1.0	10.5	1		
t <sub>DIS</sub>	$\overline{OE}$ to $Q_N$	Figure 1	2.7V	1.0	4.4	8.3	1.0	8.5	1.0	10.0	ns		
			3.3V ± 0.3V	1.7	4.1	7.3	1.7	7.5	1.7	9.0	1		
tsk(0)	Output Skew Time		3.3V ± 0.3V			1.0				1.5	ns		

# **Operating Characteristics**

T<sub>A</sub> = +25°C

Symbol	Parameter	<b>Test Conditions</b>	Vcc	Тур	Unit
			1.8V ± 0.15V	9.9	
C <sub>pd</sub>	Power dissipation capacitance per gate	F = 10 MHz	2.5V ± 0.2V	10.2	pF
			3.3V ± 0.3V	10.6	



# Package Characteristics

<u> </u>							
Symbol	Parameter	Package	Test Conditions	Min	Тур	Max	Unit
θյΑ	Thermal Resistance Junction-to-Ambient	TSSOP-20	(Note 9)	—	74		°C/W
θ <sub>JC</sub>	Thermal Resistance Junction-to-Case	TSSOP-20	(Note 9)	—	15	-	°C/W
$\theta_{JA}$	Thermal Resistance Junction-to-Ambient	V-QFN4525-20	(Note 9)	—	67	-	°C/W
θ <sub>JC</sub>	Thermal Resistance Junction-to-Case	V-QFN4525-20	(Note 9)	—	20	_	°C/W

Note:

9. Test conditions for TSSOP-20 and V-QFN4525-20: Devices mounted on 4 layer FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout per JESD 51-7.




VΔ

0.15V

0.15V

0.3V 0.3V

### **Parameter Measurement Information**



Inputs

t<sub>r</sub>/t<sub>f</sub>

≤ 2ns

≤ 2ns

≤ 2.5ns

≤ 2.5ns

VI

Vcc

Vcc

2.7V

2.7V

٧м

V<sub>CC</sub>/2

 $V_{CC}/2$ 

1.5V

1.5V

VLOAD

2 x V<sub>CC</sub>

 $2 \times V_{CC}$ 

6V

6V

C∟


30pF

30pF


50pF

50pF

	Vcc
	1.8V ± 0.15V
	2.5V ± 0.2V
	2.7V
	3.3V ± 0.3V




Voltage Waveform Pulse Duration





A. Includes test lead and test apparatus capacitance. Notes:

- B. All pulses are supplied at pulse repetition rate  $\leq$  10 MHz. C. Inputs are measured separately one transition per measurement.
- D.  $t_{\text{PLZ}}$  and  $t_{\text{PHZ}}$  are the same as  $t_{\text{dis.}}$ E.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{EN0}$
- F. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>PD</sub>.



 $R_L$ 

1ΚΩ

500Ω

500Ω

500Ω


Voltage Waveform Enable and Disable Times Low and High Level Enabling

Figure 1 Load Circuit and Voltage Waveforms




## **Marking Information**

(1) TSSOP20

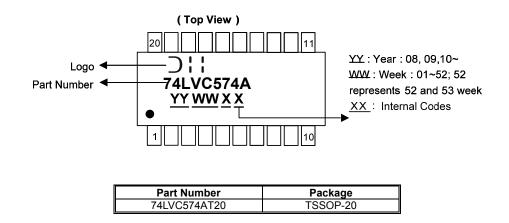

#### (2) QFN-20 (V-QFN4525-20)

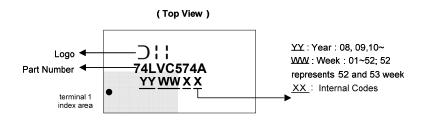


Part Number	Package
74LVC574AQ20	V-QFN4525-20



# **Package Outline Dimensions**


Please see AP02002 at http://www.diodes.com/datasheets/ap02002.pdf for the latest version.

#### (1) TSSOP-20

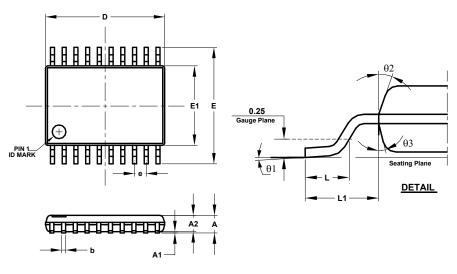

	TSSO	P-20	
Dim	Min	Max	Тур
Α	-	1.20	-
A1	0.05	0.15	-
A2	0.80	1.05	-
b	0.19	0.30	-
С	0.09	0.20	-
D	6.40	6.60	6.50
E	6.20	6.60	6.40
E1	4.30	4.50	4.40
е	0	.65 BSC	)
L	0.45	0.75	0.60
L1		1.0 REF	
θ1	0°	8°	-
θ2	10°	14°	12°
θ3	10°	14°	12°
All I	Dimensi	ons in r	nm

#### (2) QFN-20 (V-QFN4525-20)

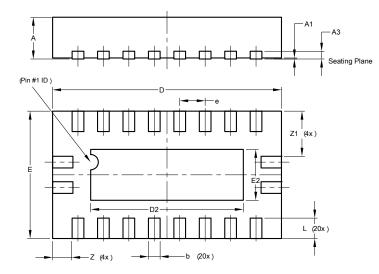


V-QFN4525-20				
Dim	Min	Max	Тур	
Α	0.75	0.85	0.80	
A1	0.00	0.05	0.02	
A3	-	-	0.15	
b	0.18	0.30	0.23	
D	4.45	4.55	4.50	
D2	2.85	3.15	3.00	
E	2.45	2.55	2.50	
E2	0.85	1.15	1.00	
е	0.50BSC			
L	0.30	0.50	0.40	
Z	-	-	0.385	
Z1	-	-	0.885	
All Dimensions in mm				



# **Suggested Pad Layout**


Please see AP02001 at http://www.diodes.com/datasheets/ap02001.pdf for the latest version.

#### (1) TSSOP-20



Dimensions	Value (in mm)	
С	0.650	
Х	0.420	
X1	6.270	
Y	1.789	
Y1	4.160	
Y2	7.720	

#### (2) QFN-20 (V-QFN4525-20)

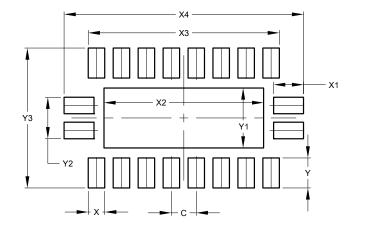

Dimensions	Value (in mm)
С	0.500
Х	0.330
X1	0.600
X2	3.200
X3	3.830
X4	4.800
Y	0.600
Y1	1.200
Y2	0.830
Y3	2.800



#### IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2014, Diodes Incorporated

www.diodes.com